


# CONVENTIONAL FLOODED MOTORCYCLE BATTERY

## LB16AL-A2 (12V16Ah)

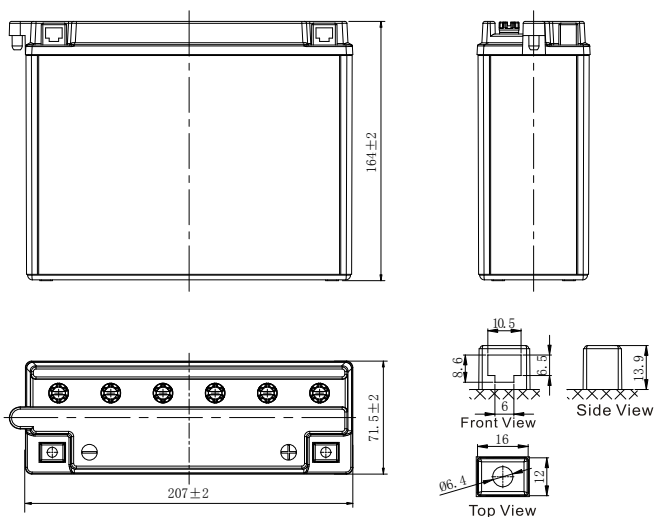

## GENERAL FEATURES

- Low maintenance
- High performance and dry charged high quality and flooded battery
- Shipped without battery electrolyte pre-charged and ready to install

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leoch.us

Leoch Europe S.A.  
www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.  
© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

## CHARACTERISTICS

Item	Specifications	
Nominal Voltage	12V	
Nominal Capacity (10HR)	16Ah	
Cold Cranking Performance Amps@0°F (-18°C)	175A	
Dimension (±2mm)	Length	207mm (8.15inches)
	Width	71.5mm (2.81inches)
	Container Height	164mm (6.46inches)
	Total Height	164mm (6.46inches)
Battery (with acid)	Approx Weight	5.64kg (12.4lbs)
Electrolyte	Approx Weight	1.54kg (3.40lbs)
Terminal type	F	
Battery type	Conventional Flooded (High Performance) Series	
Constant-Voltage Charge:		
Initial charging current	Less than 0.3C <sub>10</sub>	
Voltage	14.40V~15.00V at 25°C (77°F)	
Charging time	16~24h	
Constant-Current Charge:		
Charging current 0.1C <sub>10</sub> , when charging voltage up to 15.60V, continue to charge 2h		
Floating Charge	Initial charging current	Unlimited
	Voltage	13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%

