


# MAINTENANCE-FREE MOTORCYCLE BATTERY

## EBX14AHL-BS (12V12Ah)

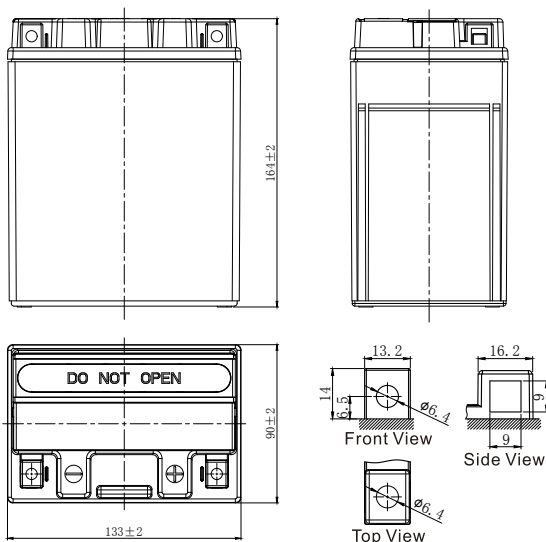

## GENERAL FEATURES

- Sealed AGM battery
- Rest after filling acid
- Fresh Pack, Maintenance-Free

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.  
[www.leoch.com](http://www.leoch.com)

Leoch Batteries Pte Ltd  
[www.leoch.sg](http://www.leoch.sg)

Leoch Battery Corporation  
[www.leoch.us](http://www.leoch.us)

Leoch Europe S.A.  
[www.leoch.eu](http://www.leoch.eu)

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.  
 © LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

## CHARACTERISTICS

Item	Specifications	
Nominal Voltage	12V	
Nominal Capacity (10HR)	12Ah	
Cold Cranking Performance Amps@0°F (-18°C)	220A	
Dimension (±2mm)	Length	133mm (5.24inches)
	Width	90mm (3.54inches)
	Container Height	164mm (6.46inches)
	Total Height	164mm (6.46inches)
Battery (with acid)	Approx Weight	4.42kg (9.74lbs)
Electrolyte	Approx Weight	0.77kg (1.70lbs)
Terminal type	A	
Battery type	Dry Charged Series	
Full Charge	Constant-Voltage Charge:	
	Initial charging current	Less than 0.3C <sub>10</sub>
	Voltage	14.40V~15.00V at 25°C (77°F)
	Charging time	15~18h
	Constant-Current Charge:	
	Charging current 0.1C <sub>10</sub> , when charging voltage up to 14.40V, continue to charge 4h	
Floating Charge	Initial charging current	Unlimited
	Voltage	13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%

## Discharge Characteristics (25°C, 77°F)

