


MAINTENANCE-FREE MOTORCYCLE BATTERY

LTR4A-BS (12V2.3Ah)



CHARACTERISTICS


Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	2.3Ah
Cold Cranking Performance Amps@0°F (-18°C)	30A
Dimension (±2mm)	Length 113mm (4.45inches)
	Width 48mm (1.89inches)
	Container Height 85mm (3.35inches)
	Total Height 85mm (3.35inches)
Battery (with acid)	Approx Weight 0.99kg (2.18lbs)
Electrolyte	Approx Weight 0.16kg (0.353lbs)
Terminal type	I
Battery type	Dry Charged Series
Full Charge	Constant-Voltage Charge:
	Initial charging current Less than 0.3C ₁₀
	Voltage 14.40V~15.00V at 25°C (77°F)
	Charging time 15~18h
	Constant-Current Charge:
Floating Charge	Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h
	Initial charging current Unlimited
	Voltage 13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F) 106%
	25°C (77°F) 100%
	0°C (32°F) 86%
	-15°C (5°F) 65%

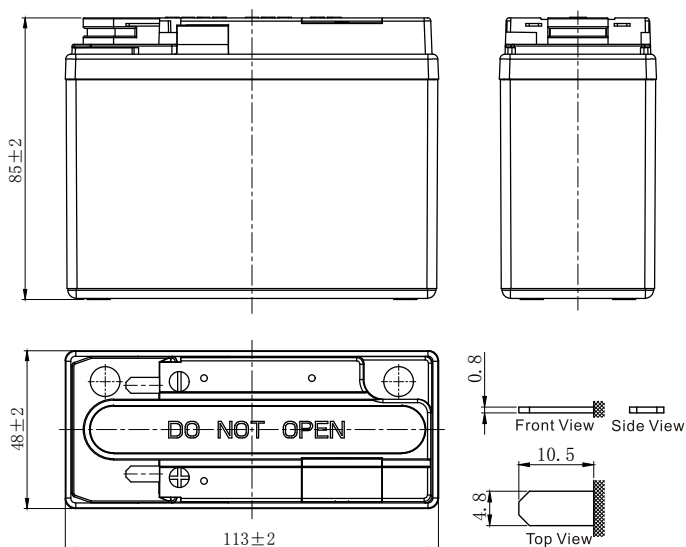

GENERAL FEATURES

- Sealed AGM battery
- Rest after filling acid
- Fresh Pack, Maintenance-Free

Discharge Characteristics (25°C, 77°F)

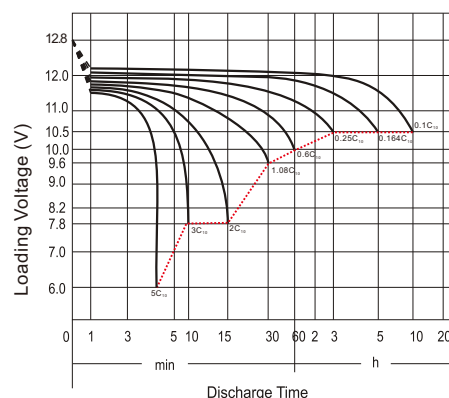

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leoch.us

Leoch Europe S.A.
www.leoch.eu